



ALUMINUM DOOR

QTY's

- ___ - LH-In
- ___ - RH-In
- ___ - LH-Out
- ___ - RH-Out

Prepared By: _____

Customer: _____

Job Name: _____

DOOR STILE (circle one) - Wide or Medium or Narrow

COLOR (Circle One) - Clear Anodized or Bronze Pt. or Black Pt. or Other _____

GLASS THICKNESS (circle one) - 1/4" or 3/8" or 1/2" Glass By Raco? YES or NO

RATING (circle one) - Non-Rated

Please See attached pages for Stile & Rail Details...

ELEVATION # _____

List Opening #'s below, under appropriate swing


LH-IN DOOR #s

RH-IN DOOR #s

LH-Out DOOR #s

RH-Out DOOR #s

Offset & Flush Sliders
IN ORDER TO MEET ADA
COMPLIANCE SLIDER OPENINGS
MUST HAVE A MINIMUM FRAME
OPENING WIDTH OF 38"

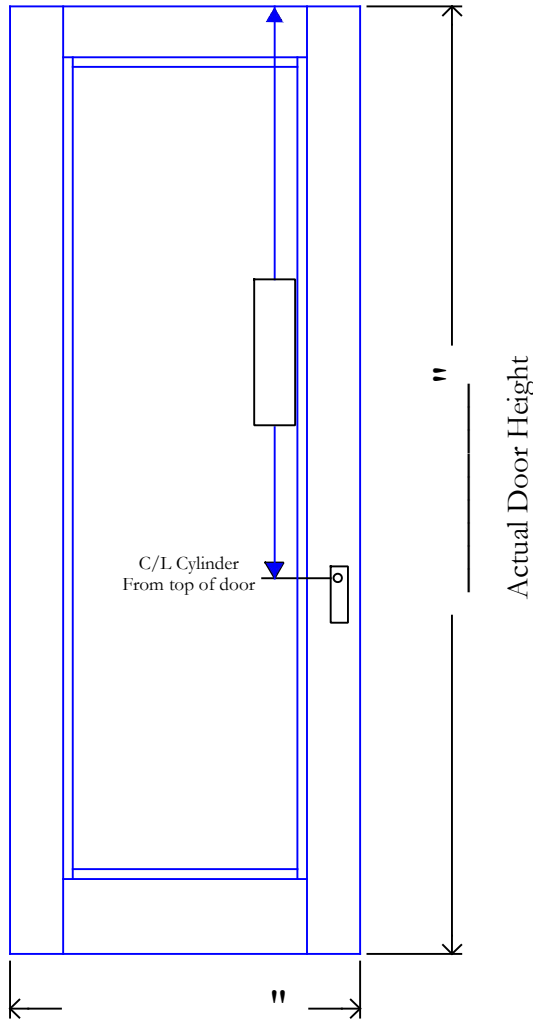

WIDE TOP RAILS: WS200
 MEDIUM TOP RAIL: D-101
 NARROW TOP RAILS: D-201

WIDE STILES: WS400
 MEDIUM STILES: MS400
 NARROW STILES: DT400

WIDE BOTTOM RAILS: WS195 OR WS100
 MEDIUM BOTTOM RAIL: WS100 OR WS195
 NARROW BOTTOM RAILS: D-101 OR WS195

NOTE: * Please provide make & Model of Lock.
 * All slider doors require a 1/2" Undercut.
 * Sliders for Pocket, Bifold, & Bypass units are typically supplied with beveled edges and not Radius as detailed.

SPECIAL NOTES:

APPROVED BY: _____