38” cased opening width required to meet a
32” min. ADA compliant clear opening width

RACO 487 Offset Slider

Typical Door, Frame & Sidelite Details

REINFORCEMENT BLOCK REQUIRED

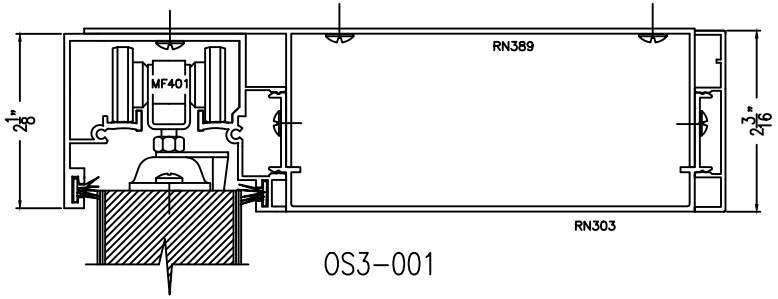

OS3–001

REINFORCEMENT BLOCK REQUIRED

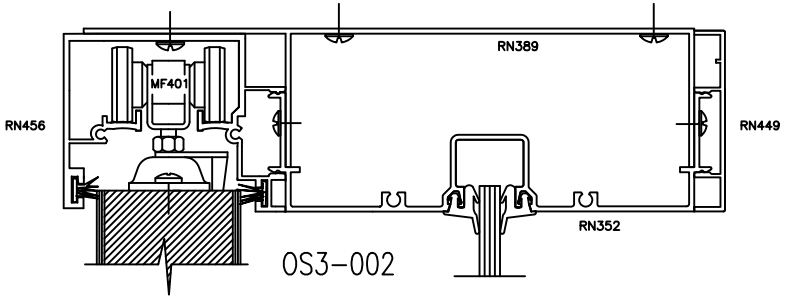

OS3–002

OS3–016

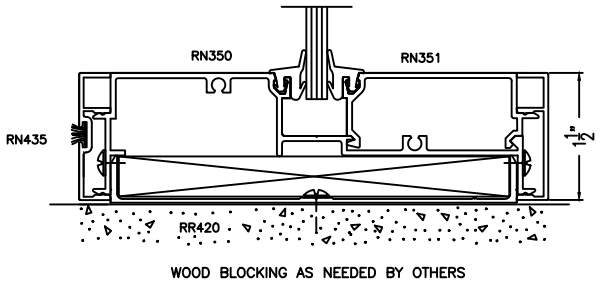



FLOOR GUIDE

OS3–014R

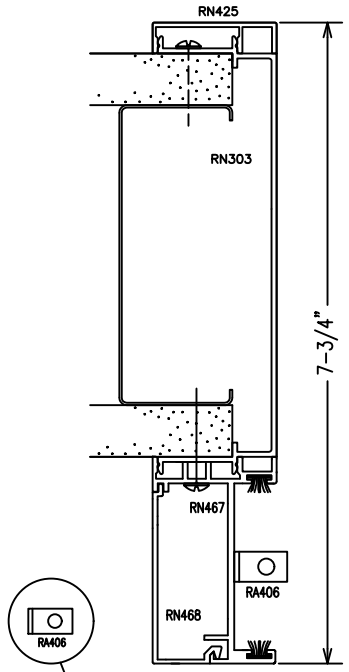

The RA406 clip is installed at the head of the RN467 receiver inside the track to assure a tight seam.

OS3–005

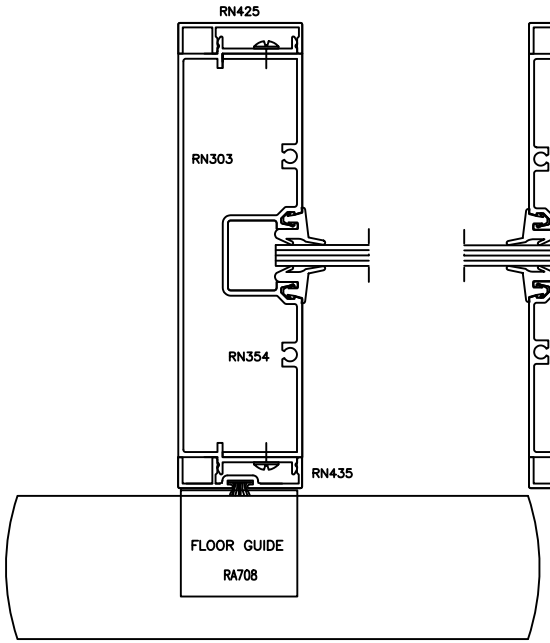

N3–007

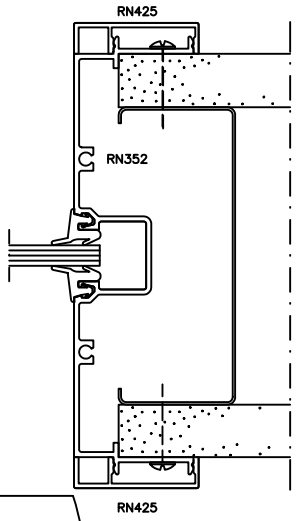

Revised 2/10/2026