38" cased opening width required to meet a
32" min. ADA compliant clear opening width

RACO 225 Flush Slider

Typical Door, Frame & Track Details

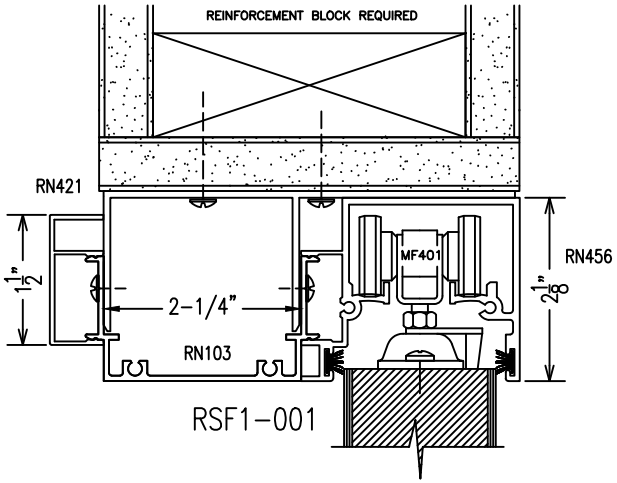

RSF1-001

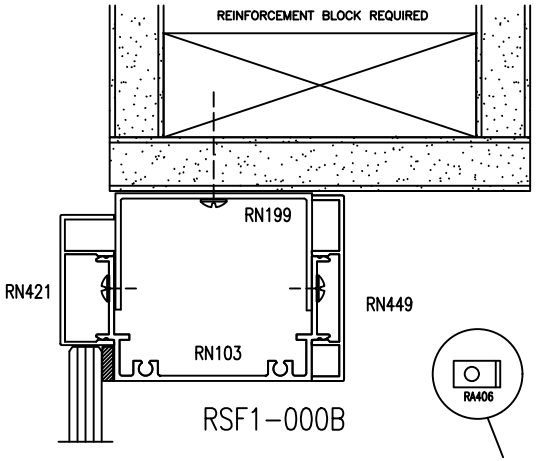

RSF1-000B

The RA406 clip is installed at the head of the RN467 receiver inside the track to assure a tight seam.

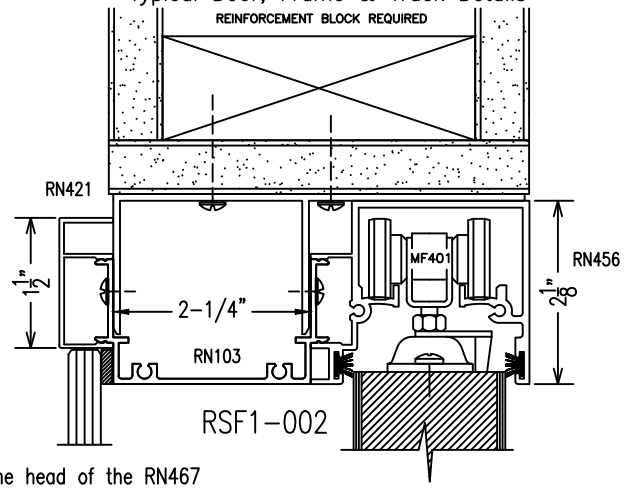

RSF1-002

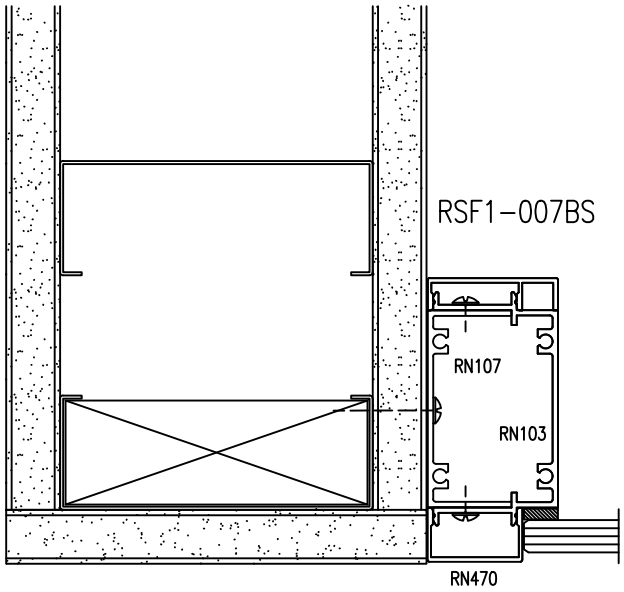

RSF1-005

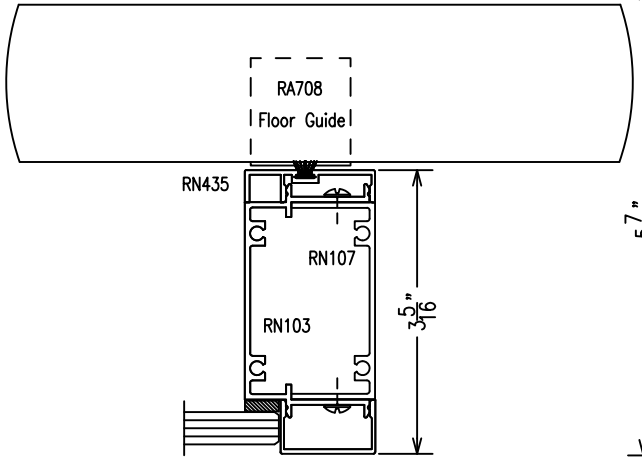

WOOD BLOCKING REQUIRED BY OTHERS
MINIMUM 4" TALL BLOCKING AT FLOOR FOR VERTICAL STABILITY
STRUCTURAL SUPPORT

RSF1-014B

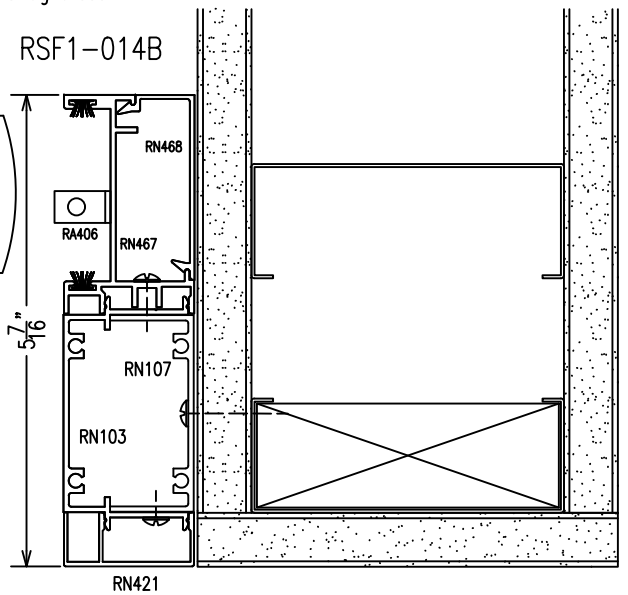

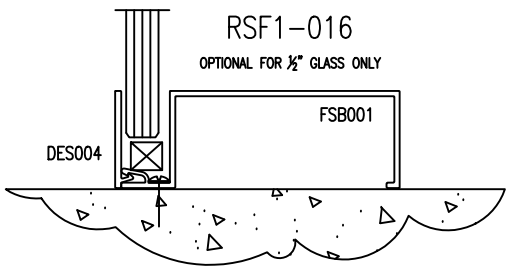



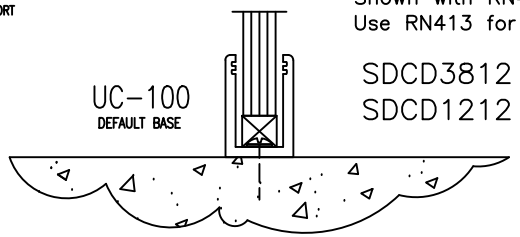

Shown with RN470 trim used for ½" glass
Use RN413 for ¼" glass & RN484 for ⅜" glass

SDCD3812 for 1/4" & 3/8"
SDCD1212 for 3/8" & 1/2"

Revised 4/24/2026